



沧州盛世伟业汽车配件有限公司

CANGZHOU SHENGSHIWEIYE AUTOMOBILE ACCESSORY CO.,LTD

ADD:Cangzhou,Hebei,China

Mobile phone:0086-18713779288


Website:www.wheelbalanceweights.com

www.ssqcpj.com

www.ssqp.net

www.tirechanger.com.cn

E-mail: wheelweight9@ssqcpj.com

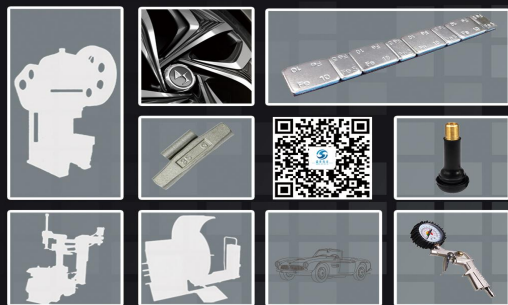


TRUCK TIRE CHANGER

S-T568




- SEMI-AUTOMATIC TRUCK TYRE CHANGER T568 UNIVERSAL SELF-CENTERING CHUCK RIM CAPACITY 14" -26"
- CLOCKWISE AND ANTICLOCKWISE ROTATION OF CHUCK
- ITALIAN PUMP OPTIONAL

OPTIONAL ACCESSORIES



Alu alloy rims protection rings

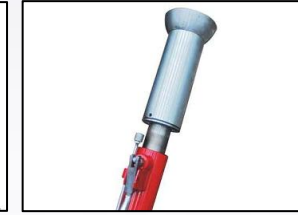

Tubeless roller



Alu alloy rims protection set

TECHNICAL DATA

Rim diameter	14" -26"
Max.wheel weight	500kg
Max.wheelwidth	780mm
Max.tyre diameter	1600mm
Hydraulic pump motor	1.5kw 380v-3ph(220V Optional)
Gearbox motor	1.8kw 380v-3ph(220v Optional)
Bead breaker force	2500kg
Operation controlvoltage	24V
Machine weight approx	570kg
Overall dimensions approx	2500x2000mm
Power	220/400V 50/60Hz1P/3P Optional


WEIGHT&DIMENSIONS

Model	Gross Weight(kg)	OutsideDimension LxWxH(mm)
S-T 568	647kg	2030x1600x1000

STANDARD ACCESSORIES



PACKAGING

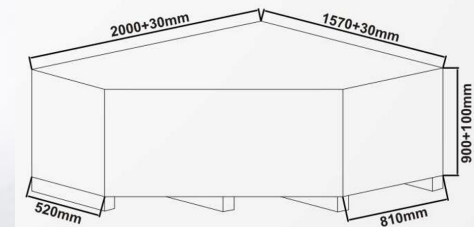


TRUCK TIRE CHANGER

S-T568-2




- Double speed for rotation motor
- Import hydraulic pump
- Alu protection kit as standard accessory
- Small floor area

OPTIONAL ACCESSORIES

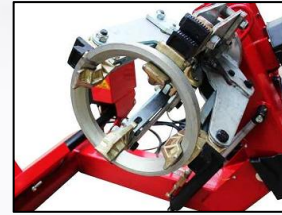

Alu alloy rims protection rings



Tubeless roller



Alu alloy rims protection set

TECHNICAL DATA

Rim diameter	14" -26"
Max.wheel weight	500kg
Max.wheel width	780mm
Max.tyre diameter	1600mm
Hydraulic pump motor	1.5kw 380v-3ph(220V Optional)
Gearbox motor	1.8kw 380v-3ph(220v Optional)
Bead breaker force	2500kg
Operation controlvoltage	24V
Machine weight approx	588kg
Overall dimensions approx	2500x2000mm
Power	220/400V 50/60Hz1P/3P Optional


WEIGHT&DIMENSIONS

Model	Gross Weight(kg)	OutsideDimension LxWxH(mm)
S-T 568-2	650kg	1730x1480x950

STANDARD ACCESSORIES



PACKAGING

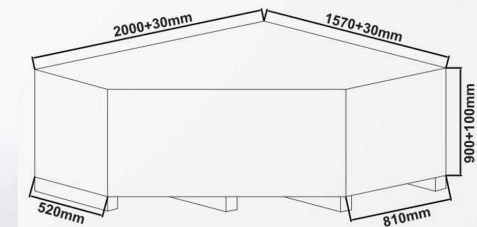

TRUCK TIRE CHANGER

S-T588



- Hydraulic motor system tyre operation much more powerful;
- Automatic hydraulic mounting arm finds precise angle;
- Double pressing roller suitable for different sizes of tubeless tyre;
- This vertical truck type changer saves more space and works more efficiency

OPTIONAL ACCESSORIES



Alu alloy rims protection rings



Tubeless roller



Alu alloy rims protection set


TECHNICAL DATA

Rim diameter	19" - 26"
Max.wheel weight	380kg
Max.wheelwidth	470mm
Max.tyre diameter	1400mm
Hydraulic pump motor	3.3KW 380V - 3PH - 50HZ
Gearbox motor	2.2KW 380V - 3PH (220V Optional)
Machine Weight Approx	485kg

STANDARD ACCESSORIES



PACKAGING

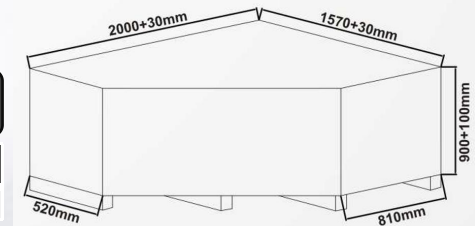

WEIGHT&DIMENSIONS

Model	Gross Weight(kg)	OutsideDimension LxWxH(mm)
S-T 588	650kg	1300×1220×1720


TRUCK TIRE CHANGER

S-T598



- SEMI-AUTOMATIC UNIVERSAL TRUCK TYRE CHANGER T598 FOR INDUSTRIAL, AGRICULTURAL AND EARTHMOVING WHEELS
- RIM CAPACITY 14" -42"
- ITALIAN PUMP OPTIONAL


OPTIONAL ACCESSORIES



UNIVERSAL SELF-CENTRING CHUCK, OPERATE SIZE FROM 14" TO 42"



Alu alloy rims protection rings

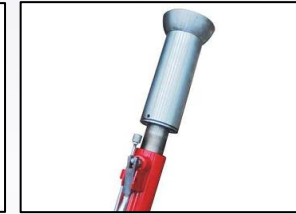

Tubeless roller



Alu alloy rims protection set

TECHNICAL DATA

Rim diameter	14" -42"
Max.wheel weight	1600kg
Max.wheelwidth	1050mm
Max.tyre diameter	2300mm
Hydraulic pump motor	2.2kw 380v-3ph-50Hz(220V Optional)
Gearbox motor	2.2kw 380v-3ph-50Hz(220V Optional)
Bead breaker force	3300kg
Operation control voltage	24V
Machine weight approx	758kg
Overall dimensions approx	2500x2000mm
Power	220/400V 50/60Hz 1P/3P Optional


WEIGHT&DIMENSIONS

Model	Gross Weight(kg)	Outside Dimension LxWxH(mm)
S-T 598	850kg	2130x1850x1090

STANDARD ACCESSORIES



PACKAGING

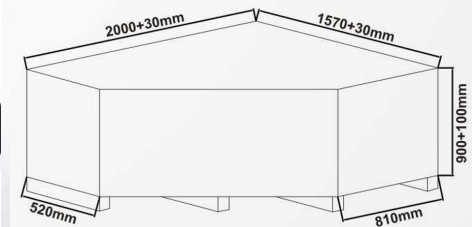

TRUCK TIRE CHANGER

S-T698



- FULLY-AUTOMATIC UNIVERSAL TRUCK TYRE CHANGER T698 FOR INDUSTRIAL, AGRICULTURAL AND EARTHMOVING WHEELS
- RIM CAPACITY 14" -42"
- 2 ROTATIONAL SPEEDS OPTIONAL
- ITALIAN PUMP OPTIONAL

PRODUCTION DETAILS



Italian hydraulic pump 意



OPTIONAL ACCESSORIES



Alu alloy rims protection rings



Tubeless roller



Alu alloy rims protection set

TECHNICAL DATA

Rim diameter	14" -42"
Max.wheel weight	1600kg
Max.wheelwidth	1050mm
Max.tyre diameter	2300mm
Hydraulic pump motor	2.2kw380v-3ph-50Hz(220V Optional)
Gearbox motor	2.2kw 380v-3ph-50Hz(220V Optional)
Bead breaker force	3300kg
Operation controlvoltage	24V
Machine weight approx	760kg
Overall dimensions approx	2500x2000mm
Power	220/400V 50/60Hz1P/3P Optional


WEIGHT&DIMENSIONS

Model	Gross Weight(kg)	OutsideDimension LxWxH(mm)
S-T 698	850kg	2230x2040x1090

STANDARD ACCESSORIES



PACKAGING

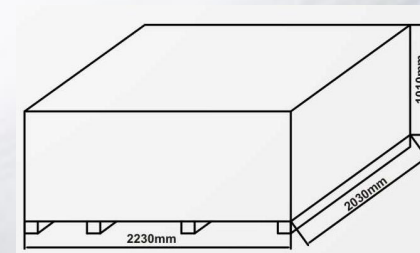

TRUCK TIRE CHANGER

S-T980



- T980 SUPER TRUCK TYRE CHANGER HAS BEEN SPECIFICALLY DESIGNED TO MOUNT AND DEMOUNT TYRES FROM TRUCKS BUSES, TRACTORS AND EARTHMOVING VEHICLES
- RIM CAPACITY 14"-56"
- BI-DIRECTIONAL CHUCK WITH 2 ROTATIONAL SPEEDS
- ITALIAN PUMP OPTIONAL

STANDARD ACCESSORIES



56" Extension Chucks

TECHNICAL DATA

Rim diameter	14" -46"
Rim capacity(with extensions)	14" -56"
Max.wheel weight	2000kg
Max.wheel width	1200mm
Max.tyre diameter	2500mm
Hydraulic pump motor	2.4/3.0 kw
Geatbox motor	2.4/3.0 kw
Machine weight approx	1145kg
Power	400v 50HZ 3PH

OPTIONAL ACCESSORIES




Alu alloy rims protection rings

WEIGHT&DIMENSIONS

Model	Gross Weight(kg)	Outside Dimension LxWxH(mm)
S-T 980	1300kg	2130x2100x1100

TRUCK TIRE CHANGER

S-T998A



STANDARD ACCESSORIES



56" Extension Chucks

TECHNICAL DATA

Rim diameter	14" -48"
Rim capacity(with extensions)	14" -60"
Max.wheel weight	2000kg
Max.wheel width	1400mm
Max.tyre diameter	2600mm
Hydraulic pump motor	2.4/3.0 kw
Geatbox motor	2.4/3.0 kw
Machine weight approx	1145kg
Power	400v 50HZ 3PH

OPTIONAL ACCESSORIES



Alu alloy rims protection rings

WEIGHT&DIMENSIONS

Model	Gross Weight(kg)	OutsideDimension LxWxH(mm)
S-T 998A	1450kg	2320x2100x1000

