



沧州盛世伟业汽车配件有限公司

CANGZHOU SHENGSHIWEIYE AUTOMOBILE ACCESSORY CO.,LTD




SHENGSHIWEIYE

CANGZHOU SHENGSHIWEIYE AUTOMOBILE ACCESSORY CO.,LTD

Kongzhuang, Guozhuang Town, Xian County, Cangzhou City,
Hebei China.Tel:86-317-2049866
Fax:86-317-2049688
Mobile phone:8618713779288
Email: wheelweight9@ssqcpj.com

AUTO MANUAL JACKS

Focusing on the development, production and sales of automotive repair tools

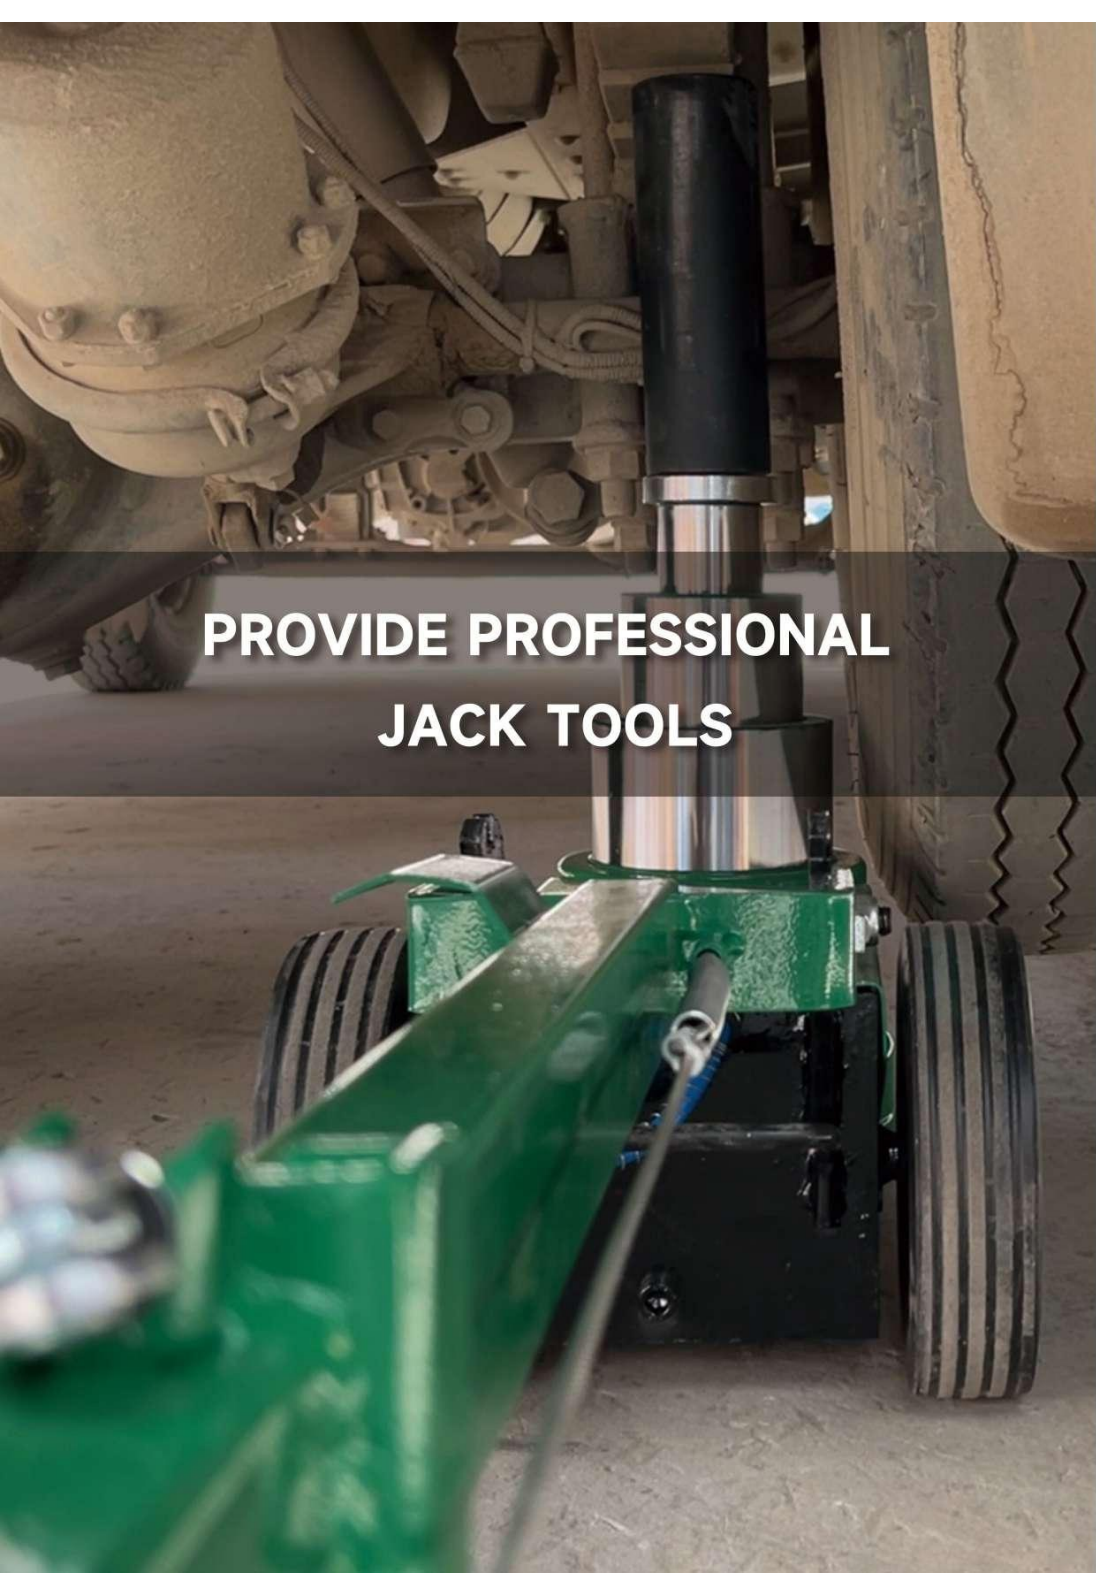

**PROVIDE PROFESSIONAL
JACK TOOLS**

JACK SERIES



BOTTLE JACK

Lightweight and convenient Thick base Flexible lift Specifications complete



DETAILED PARAMETERS

Model	Capacity	Minimum H(mm)	Maximum H(mm)	Lifting height(mm)	Net weight(KG)
2 T	2 Ton	145	235	90	2.13
3 T	3 Ton	170	280	110	2.30
4 T	4 Ton	170	280	110	2.66
5 T	5 Ton	170	280	110	3.00
6 T	6 Ton	180	300	120	3.40
8 T	8 Ton	190	320	130	4.00
10 T	10 Ton	180	280	100	3.60
12 T	12 Ton	190	320	130	5.20
16 T	16 Ton	225	345	120	6.63
20 T	20 Ton	220	370	150	8.20
32 T	32 Ton	255	420	165	10.70
50 T	50 Ton	285	460	175	20.90
100T	100 Ton	330	510	180	75.00

PNEUMATIC AIR JACK

The use of compressed gas as the power liquid pressurization and telescopic hydraulic cylinder combination of new lifting equipment



DETAILED PARAMETERS

Model	Capacity	Minimum H(mm)	Maximum H(mm)	Lifting height(mm)	Net weight(KG)
8001	5 Ton	210	430	140	7.0
8002	12 Ton	250	495	165	12.0
8002-1	12 Ton	250	495	165	12.0
8003	20 Ton	210	410	120	14.0
8004	20 Ton	260	510	170	15.0
8005	20 Ton	260	430	130	14.0

PNEUMATIC AIR JACK

The use of compressed gas as the power liquid pressurization and telescopic hydraulic cylinder combination of new lifting equipment



DETAILED PARAMETERS

Model	Capacity	Minimum H(mm)	Maximum H(mm)	Lifting height(mm)	Net weight(KG)	Package Size(mm)
ST1010	1 Ton	80	330	365	1.5	475*385*200
ST1015	1.5Ton	100	370	415	2.15	505*405*240
ST1020	2Ton	120	395	450	3.5	560*470*260

PNEUMATIC AIR JACK

The use of compressed gas as the power liquid pressurization and telescopic hydraulic cylinder combination of new lifting equipment




DETAILED PARAMETERS

Model	Capacity	Minimum H(mm)	Maximum H(mm)	G.W/N.W(kg)	Package size(mm)
S-T20"	3 Ton	125	348	10/9kg	565x240x140
S-T33"	3 Ton	125	660	12/11kt	895x270x140
S-T48"	3 Ton	125	1020	15/14kg	1265x270x140
S-T60"	5 Ton	125	1330	16/15kg	1565x270x140

SCISSOR CAR JACK

This versatile 2 ton scissor jack is designed to fit any type of vehicle including sedans, coupes, SUVs, MPVs, hatchbacks, crossovers, wagons and more including sedans, coupes, SUVs, MPVs.

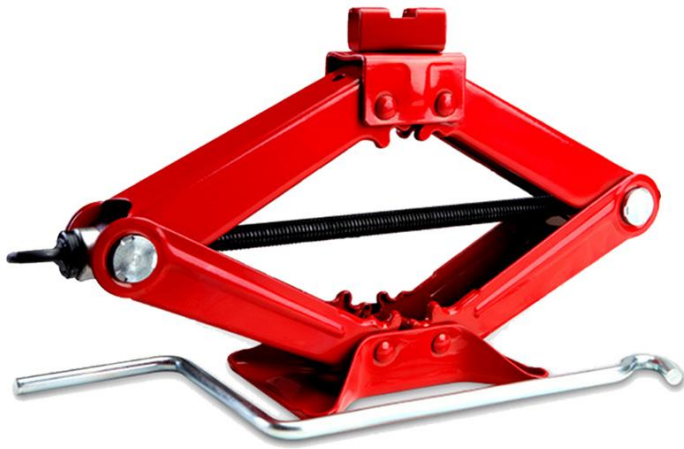

DETAILED PARAMETERS

Model	Capacity	Minimum H(mm)	Maximum H(mm)	Lifting height(mm)	Net weight(KG)
8022-1	22Ton	225+20	435+100	130	36
8022-2	30Ton	263+20	538+100	155	42
8022-3	35Ton	263+20	538+100	155	42
8022-4	50Ton	267+20	427+100	160	44.5

FARMER CAR JACK

Ideal for off-road and harsh environments, farm-related applications and as an emergency fire and rescue tool





DETAILED PARAMETERS

Model	Capacity	Minimum H(mm)	Maximum H(mm)	Lifting height(mm)	Net weight(KG)
8022-1	22Ton	225+20	435+100	130	36
8022-2	30Ton	263+20	538+100	155	42
8022-3	35Ton	263+20	538+100	155	42
8022-4	50Ton	267+20	427+100	160	44.5

MECHANICAL LIFTING JACK

Widely used in factories, warehouses, docks, railways construction projects, and other places. Suitable for installing various mechanical equipment.

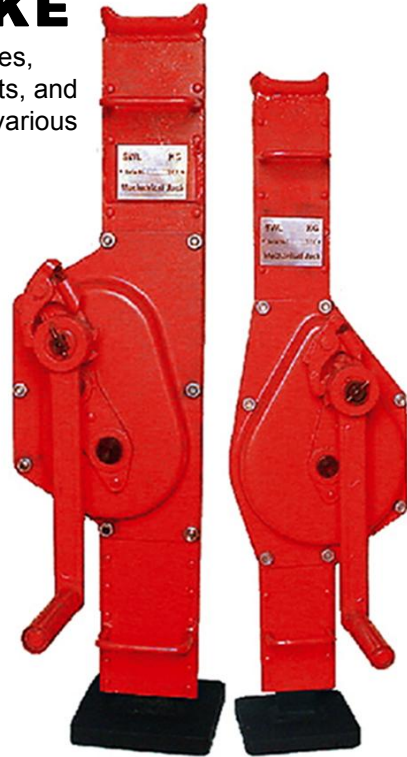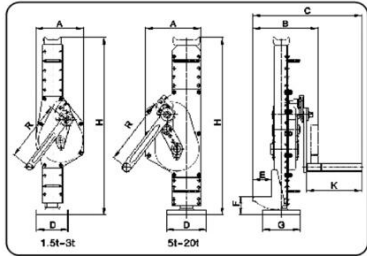

DETAILED PARAMETERS

Model	Stroke (mm)	Minimum H(mm)	Maximum H(mm)	G.W/N.W(kg)	Package size(mm)
1.5 T	300	60	600	135./16kg	620x180x190
3 T	350	70	730	21.2/22kg	760x260x230
5 T	350	80	730	28.5/30kg	790x220x280
10 T	410	85	800	46.8/49kg	850x290x340
15 T	320	95	800	65/68kg	850x320x350
20 T	320	100	800	75/78kg	920x320x350

JACK STAND

The stand can be raised or lowered to the required height; Self-locking ratchet for ease of use. Durable steel frame with stainless coating;



DETAILED PARAMETERS

Model	Stroke (mm)	Minimum H(mm)	Maximum H(mm)	G.W/N.W(kg)	Package size (mm)
S-T049-1	2 Ton	280	380	4.6/4.4kg	200x185x350
S-T049-2	3 Ton	70	730	21.2/22kg	760x260x230
S-T049-3	6 Ton	80	730	28.5/30kg	790x220x280
S-T049-4	12 Ton	85	800	46.8/49kg	850x290x340

PORTA POWER JACK

As a common tool for sheet metal repair, it has strict requirements for its quality and durability, and requires professional knowledge of the operator.



DETAILED PARAMETERS

Model	Spec	Minimum H(mm)	Maximum H(mm)	G.W/N.W(kg)	Package size(mm)
S-T050-4	4Ton	260	380	18/17kg	590x330x180
S-T050-10	10Ton	355	490	32/31kg	740x400x180
S-T050-11	10 Ton iron box	355	490	33/32kg	850x420x180
S-T050-12	10 Ton With wheels	355	490	33/32kg	670x390x180
S-T050-13	20 Ton iron box	365	505	44/42kg	670x390x180

AIR BAG JACK

Rubber rollers Portable carry handle Top lift fast Extra large bracket head



DETAILED PARAMETERS

Model	Stroke (mm)	Minimum H(mm)	Maximum H(mm)	G.W/N.W (kg)	Package size (mm)
2802A	2 Ton	115	280	16.5/15.5kg	510x420x170
2802C	2 Ton	115	280	16.5/15.5kg	510x420x170
2803A	3 Ton	150	400	17.0/16.0kg	510x420x170
2805A	5 Ton	150	400	23.5/22.5kg	520x480x200
2805B	6 Ton	150	400	24.0/23.0kg	520x480x200